


C3-400

Access Control
RFID 4 X Door Controller

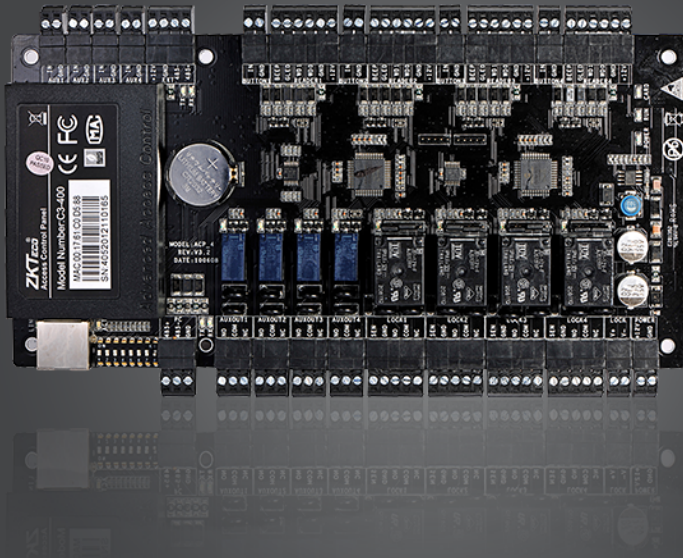

Features

Standard Features

- SD Card data backup
- Multiple hardware protection
- Supports different Wiegand readers
- Input / Output ports to control doors
- Stores 30000 user templates

Enhanced Features

- Anti-passback
- Interlock function
- Duress mode
- Webserver structure software

Software

- ZK Access Control Management 5.2

Related Products



CR10-E



KR100



RFID Cards



Exit Button



Maglocks




Mini UPS

Specifications

- User Capacity: 30,000 Cards
- Transaction Capacity: 100,000 transactions
- Communication: RS485, TCP/IP
- Data Backup: SD-card
- Output: 8 (4 X relay for lock & 4 X relay for Auxiliary)
- Wiegand IN Ports: 4
- Wiegand(Card reader): 4 (26-bit & 34bit)
- Access Control interfaces: 3rd party electric lock, door sensor, exit button, door alarm
- Access Control functions: Anti-passback, Duress, Interlock
- Power Supply: 9 - 14V DC 1A
- Operating Temperature: 0 °C - 55 °C
- Operating Humidity: 20% - 80%
- Dimension: 106 X 218 X 15mm

Configuration

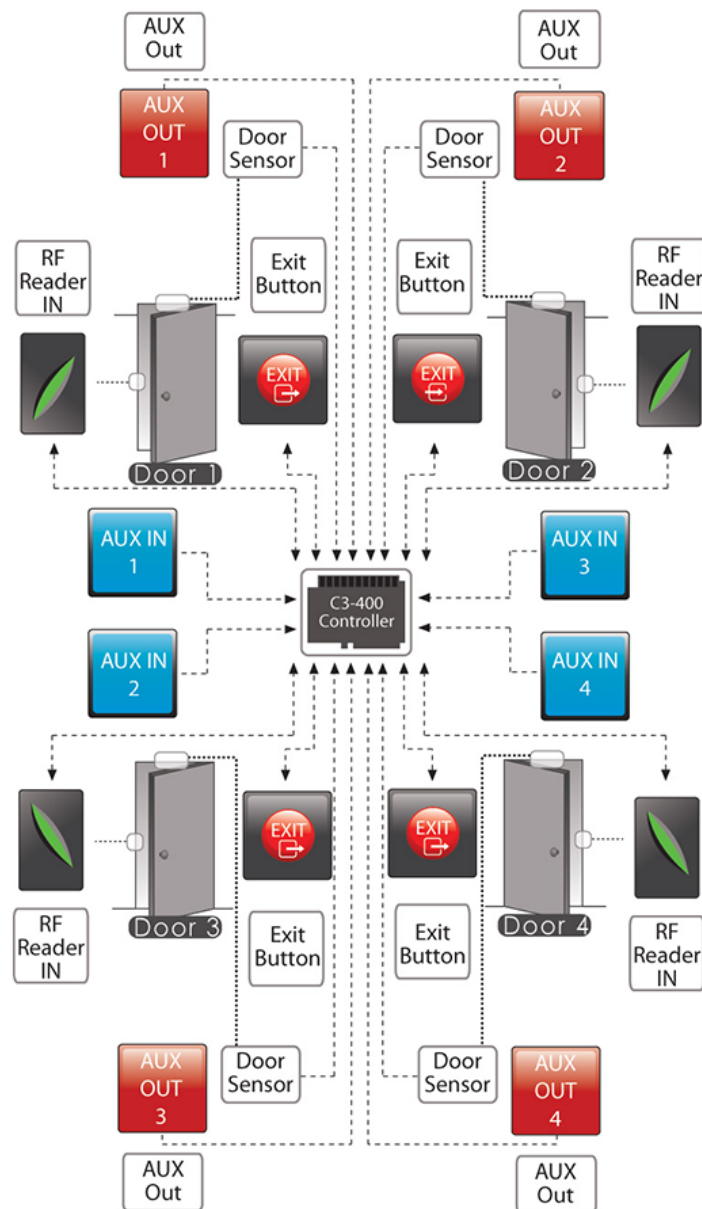

ZKTeco, ZKSoftware, ZKAccess, ZKivision, ZKbiolock, ZKAFIS are either registered trademarks or trademarks of ZKTECO INC and ZKTeco South Africa.

You must obtain written and signed permission from ZKTECO before using any photograph owned or licenced by ZKTECO.

Copyright © 1998-2014 ZKTECO INC. All rights reserved.