

High-Speed Dual-Sided Plastic Card Printer

By NBS Technologies



ImageMaster™ D-40



HIGH-SPEED DUAL-SIDED PLASTIC CARD PRINTER WITH FEATURES & PERFORMANCE THAT PERFORMS WELL IN THE MOST DEMANDING ENVIRONMENTS

THE IMAGEMASTER™ D-40 OFFERS THESE KEY FEATURES AND BENEFITS:



COMPACT AND FLEXIBLE

- Delivers fast monochrome printing: up to 4000 cph single-sided & 1500 cph dual-sided
- Programmable card cleaning to help maintain quality
- Can operate as a stand-alone unit with keyboard



NETWORK AND ENCODING

- Supports Ethernet and Serial connectivity
- Options for magnetic encoding & contact or contactless smart card personalization - or both



EASY-TO-USE


- 500 card input hopper & output stacker
- LCD screen displays printer status and diagnostics
- Easy to change ribbon and thermal print head
- Clear card support is standard

Printer Specifications

Single/Dual-sided	Fast, monochrome printing single-sided and double-sided printing
Print method	Thermal transfer (mono)
Card encoding options	Magnetic encoding: 3 track, Dual Coercivity, ISO 7811, Bit to Bit (binary), JISA, JISC and JISA/ISO in single pass
Smart Card	Smart Card ISO 7816 personalization, Contactless (RF) Mifare card, ISO A & ISO B and others
Printer interfaces	Two-line, 40-character LCD Keyboard for manual data entry, RS-232C Serial 9 Pin; Ethernet 10/100bT, TCP/IP printing using LPR/LPD or Raw socket
Software drivers	Supports online printing from a variety of host computers including PC running Microsoft Windows 7, 8, 10, and AS-400 Supports both internally generated layouts using ASCII text fields from host computer, or full Microsoft Windows® compatibility with Windows 7, 8, and 10. Supported by NBS SmartSys™ Tabletop batch issuance software, a user-friendly, Windows card design and production application, ideal for batch issuance. Smartsys™ Link option increases production by allowing Smartsys to connect a batch of up to eight D-40s.
Fonts/Images	300 dots per inch (11.8 dots per mm) resolution. Full range of monochrome color ribbons (full and half widths) available. Shipped with Swiss Regular: 6, 8, 10, 14, 18, 24 pt, Swiss Italics: 6, 8, 10, 14 pt, OCRA: 10, 12 pt, Dutch Bold: 6, 8, 10, 18, 24 pt, Any True-Type font can be downloaded from Microsoft Windows to support customized fonts PC Dash Board software for use in downloading additional fonts and images also used for flash loading of firmware for easy updates. It also can be used to back the machine settings.
Barcodes	EAN 13 & 8, UPC-A, Code 39, Codabar, Code 128, Code 12 of 5. When utilizing Smartsys you can also produce QR codes & PDF417
Card capacity	500 input hopper and output stacker, 25 - reject tray, Two production counters, one re-settable In-line mailer interface option is available
Weight	70 lbs (31.8kg)
Power source	110-230 Volts, 50-60 Hz FCC Class B, CE and ETL approved
Dimensions	16" (407mm) D x 24" (610mm) W x 23" (585mm)
Environment	Operating temperature: 15°C to 30°C, Relative humidity: 20% to 65% non-condensing, Storage temperature: -5°C to 70°C, Storage humidity: 20% to 70% non-condensing, Ventilation: Free air
Monochrome Print speed	Single-sided: Up to 4000 cards per hour, Dual-sided: Up to 1500 cards per hour
Maintenance	Automatic card cleaning mechanism with user configurable cleaning

Card Specifications

Types	PVC & composite PVC - including breakaway and key cards
Maximum print area	0.100" +/- 0.010" from side edges of card
Card width/length	ISO CR-80-ISO 7810: 53.98mm (W) x 85.60mm (L) / 3.375" x 2.125"
Card thickness	0.024" (0.61 mm) to 0.030" (0.76mm) , (Optional)Thin card kit for 0.015" (0.38mm) and 0.020" (0.51 mm) cards

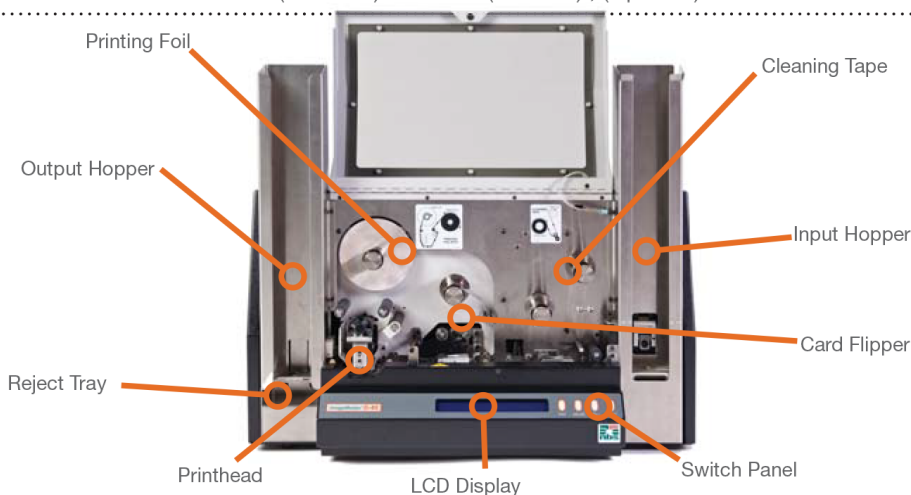

The ImageMaster D-40 works in line with our NBS-1500 Mailing System to create a low-cost issuance & fulfillment system.